


# ENTA-R - DUAL REDUNDANT ENHANCED NETWORK TIME APPLIANCE



**HaveQuick / 1PPS Referenced  
Dual Redundant Master Clock  
with Multi-Port NTP and HQ Signal Distribution**

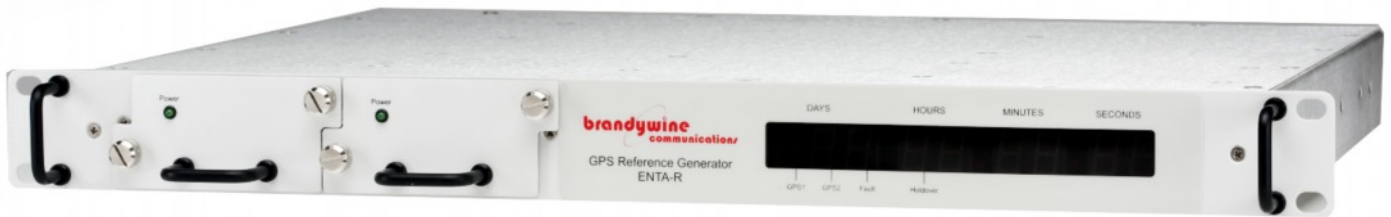

**NENA Compliant**



AS9100D Certificate Number : C0210021-AS3



# ENTA-R - DUAL REDUNDANT ENHANCED NETWORK TIME APPLIANCE

## Product Overview



The ENTA-R is a ruggedised dual redundant full function Master Clock and NTP time server unit, capable of delivering a full suite of Have Quick time code and 1PPS outputs, as well as NTP, fully compliant with NENA requirements for a Master Clock.

Time reference to UTC is established via two dual redundant Have Quick and 1PPS input channels which are used to discipline a high precision oven controlled crystal oscillator (OCXO) that maintains time should input signals be lost.

In addition to two independent NTP network ports, the ENTA-R provides four single-ended outputs and 12 differential outputs at RS422 levels, all user configurable to output either Have Quick or 1PPS.

The unit uses dual hot-swappable power supplies for high-reliability operation. A built in SNTP web-server provides a secure user friendly interface for configuring the unit while internal signal level monitors, continually check all outputs to enable rapid fault detection and isolation.

These units are typically specified for secure high integrity installations and are readily integrated as fully dual redundant systems. The ENTA-R is NENA compliant and is qualified for ship board operation making it an ideal choice for NTP and HaveQuick distribution.


## Key Feature Summary

### Timing & Interfaces

- Dual time reference inputs - Have Quick & 1PPS
- 12 User Selectable Differential Outputs as Have Quick or 1PPS
- 4 User Selectable Single Ended Outputs as Have Quick or 1PPS
- Dual port NTP Network Interface 10/100BaseT (NTPv3 [RFC 1305])
- High stability disciplined OCXO as standard
- Automatic signal fault monitoring and detection with relay contact and SNTP Trap alarms
- Compact 1U Rack Mount
- Holdover accuracy < 1µs / hour
- Dual Redundant, Hot Swappable Power Supplies

### Outputs

- 4 x 1PPS or 4 x HQ - single ended - user selectable
- 12 x 1PPS or 4 x HQ - differential - user selectable
- 2 x NTP Network ports

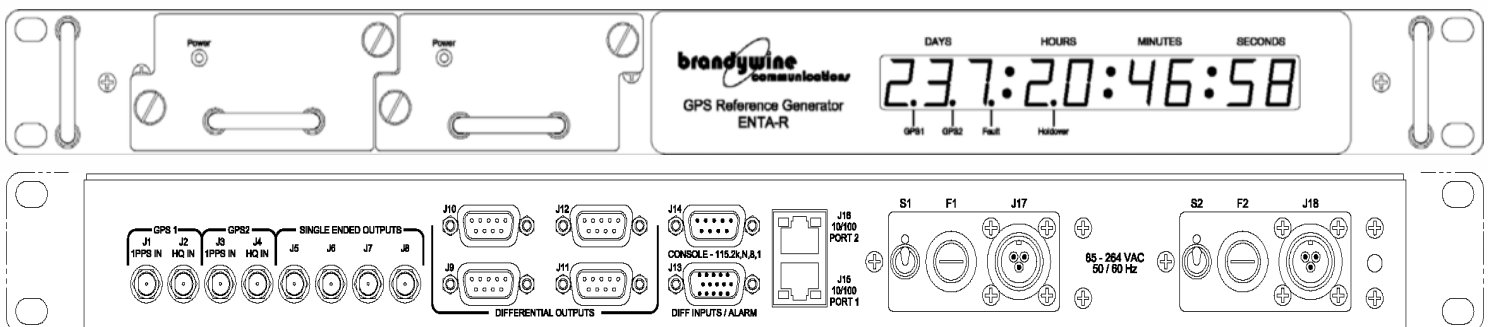

# ENTA-R - DUAL REDUNDANT ENHANCED NETWORK TIME APPLIANCE

## Specifications



Specifications - ENTA-R	
<b>Inputs - 1 PPS &amp; HaveQuick</b>	<b>Details</b>
Connectors	4 x Single Ended - SMA + 4 x Differential @ RS422 levels - 15W D Type`
Have Quick Standard	ICD-GPS-060
1PPS Accuracy	per GPS < 30ns
<b>Outputs - 1 PPS &amp; HaveQuick</b>	
Connectors	4 x Single Ended - SMA + 12 x Differential @ RS422 levels - 4 x 9W D Type`
Single Ended - 1PPS	SMA connector - 5V or 10V into 50 ohm, user-selectable - Pulse width 20 microseconds
Electrical - HaveQuick	SMA connector - 2.5V or 5V into 50 ohm, user-selectable - per ICD-GPS-060
Differential - 1PPS / HQ	4 x 9W D-type connector - 1PPS or Have Quick user-selectable
<b>Timing Accuracy</b>	
1PPS	< 30ns based on GPS
Holdover Mode (Precision OCXO)	+/- 5°C : < 24µsec/day : < 5x10-10 per month when free running TempCo : ± 2x10-9 ; -20°C to +50°C
<b>Network Interfaces</b>	
Physical	2 ports : 10/100 Base T via 2 off RJ45 connectors
Protocols	NTP Version 3 [RFC 1305], Telnet (RFC 854) , SNTP compatible (RFC 2030) SNMP, IEEE802.3, UDP/IP, ICMP
<b>Displays</b>	1 x D type Socket + 1 x BNC : Have Quick per ICD-GPS-060 ( 0 - 5V )
Time	Minutes/Hours/Seconds – UTC or Local time. LED colons indicate GPS lock status
Status LEDs	Power and Fault status, GPS1 selected / GPS2 selected
<b>Environmental</b>	
Temperature	Operating : -20°C + 50°C Storage : -55°C + 85°C
Humidity	95 % non condensing
Power	85VAC - 265VAC 50/60Hz 40W Max : MS3102A-10SL-3P connector with switch and 1A fuse
<b>Physical</b>	19" Rack 1U 1.75" (H) x 9" (D) x 14" (W) [ 4.4 cm(H) x 23 cm (D) x 35 cm (W) ] Weight : 5 lb ( 2.3) Kg
<b>Compliance</b>	MIL-STD-461F, CE101, CE102, CS114, CS116, RE101, RE102, RS101, RS103
<b>Reliability</b>	3,964,600 hours per MIL-HBK 217C
<b>Altitude</b>	Operational to 20,000 ft

# Satisfied customers include..

ABB Singapore

Airbus Defence & Space

ASM Technologies Ltd

Atkins

Babcock International

BAE Systems

BBC

Carillion Rail

CMC Engineering Malaysia

EDF Energy

Finmeccanica, UK

Indian Navy

Jakarta Metro

Leonardo Electronics Defence And Security

London Stock Exchange

London Underground

MBDA Ltd

MTRC Hong Kong

National Air Traffic Services

NEC

Network Rail National

Northrop Grumman Park Air Systems Ltd

Qinetiq Ltd

Raytheon Systems Ltd

Rockwell Automation

SBS Transit Singapore

Siemens Rail

Siemens Rail Automation Holdings Ltd.

Singapore Stock Exchange

St Electronics Singapore

Telent Technology Services Limited

Teligent

Thales UK

Transport For London

Viacom



Asia, China, India, Japan

Mr Neil Pitman  
Director of Sales - Asia  
China, India, Japan

+44 (0) 1376 5141 14 Phone  
neil.pitman@timefreq.com

Europe, Middle East, Africa, Australia

Mr David Wright  
Director of Sales, Europe, Middle East,  
Africa, Australia

Tel : +44 (0) 1694 722891  
dwright@timefreq.com

United Kingdom

Mr Mark Aheme  
Director of Sales, UK

Tel : +44 (0) 1376 5141 14  
mark.aheme@timefreq.com

**tfs** Time & Frequency Solutions

25 Eastways, Witham, Essex, CM8 3AL, UK  
Phone +44 (0) 1376 5141 14 | Fax +44 (0) 1376 5161 16  
enquiries@timefreq.com

**Brandywine**  
communications

153 Warner Ave, Tustin, CA 92780, USA  
Phone +1 714 755 1050  
Info@brandywinecomm.com

Please visit our web sites at [www.brandywinecomm.com](http://www.brandywinecomm.com) or [www.timefreq.com](http://www.timefreq.com) or call one of our regional offices.

Disclaimer : Brandywine & TFS are always seeking to improve our products, the information in this document only provides general indications of product capability, suitability and performance, none of which shall form any part of any contract.