

MGPSDO - MINIATURE GPS DISCIPLINED OSCILLATOR MODULE



Miniature GPS Referenced Commercial 10 MHz Frequency Standard Component Level Device



AS9100D Certificate Number : C0210021-AS3



MGPSDO - MINIATURE GPS DISCIPLINED OSCILLATOR MODULE

Product Overview

The miniature GPS Disciplined Oscillator combines the power of our existing disciplined oscillators in a footprint the size of an OCXO.

Designed with interoperability in mind, the Miniature GPS Disciplined Oscillator meets military requirements such as MIL-STD-188-164A. The GPSDO supplies a low noise, precision 10 MHz frequency reference signal output. This output is accurate to 1×10^{-12} when slaved to a GPS source.

The frequency standard is also able to slave to an external 1PPS signal to steer and hold the internal oscillator and clock system precisely in time. Time and frequency information is maintained to a very high accuracy during by the disciplined internal oscillator even when no satellites can be tracked.

A serial data port is provided to report time, date, position, and GPS satellite health and signal strength.

Optional capabilities include automatic interface to an external military GPS receiver such as the Defence Advanced GPS Receiver (DAGR), Standard frequency output is 10 MHz, but other frequencies are possible.

Key Feature Summary

Timing & Interfaces

- Low Phase Noise 10MHz Output
- Internal GPS Tracking Receiver
- External 1PPS Input
- Very small footprint designed for component level easy integration
- Disciplined High Stability OCXO

Outputs

- Low Phase Noise 10MHz Outputs
- Serial Time Of Day Message TOD
- 1PPS

Also of interest may be our 3 Output GPS reference oscillator module




MGPSDO - MINIATURE GPS DISCIPLINED OSCILLATOR MODULE

Specifications

Specifications - GPSDO	
Reference Signal Inputs - 1PPS	Details
Pinning	1 x Pin 6
Amplitude	0V to 5V - 50 Ohms
Reference Signal Inputs - GPS	
Connectors	1 x MMCX Connector
Receiver Type	Satellite Signal : 12 Channels : GPS L1 1575.42 Mhz / Satellite Code : C/A code 1.023 MHz
Sensitivity	138dBm
Accuracy Details	
Time Accuracy - GPS	< 30ns
Time Accuracy - 1 PPS	< 30ns
Holdover	< 20µs in 24 hrs
Power Supply Details	
Pinning	Pin 5 : 3.3V DC Pin 9 : 12 V DC Pin 7 : GND
Power	Warm up consumption : 15 Watts Steady State : 5 Watts
Outputs	
1 PPS	Pin 8 : 0 - 5V DC into 50 Ohms
10 MHz	Pin 3 : 7dBm +/- 2dBm
GPS Lock Indicator	Pin 4 : TTL
Interface	
RS 232, TTL levels	Pin 1 : RS232 Tx Pin 2 : RS232 Rx Pin 7 : GND
Environmental	
Temperature	Operational : -20°C + 60°C / Storage -40°C to + 85°C.
Humidity	95 % non condensing
Altitude	Operational to 10,000 ft - transit not operational to 50,000 ft
Physical	50mm x 50mm x 25mm

Phase Noise / Short Term Stability (10MHz)	
SSB Phase Noise	dBc/Hz
1 Hz	-90
10 Hz	-120
100 Hz	-145
1 KHz	-151
10 KHz	-153
100 KHz	-155
STS (Allan Variance) (after 24hrs)	
1 Sec	< 8.0 x 10 ⁻¹²
10 Sec	< 1.0 x 10 ⁻¹¹
100 Sec	< 1.5 x 10 ⁻¹¹
1000 Sec	< 1.5 x 10 ⁻¹¹

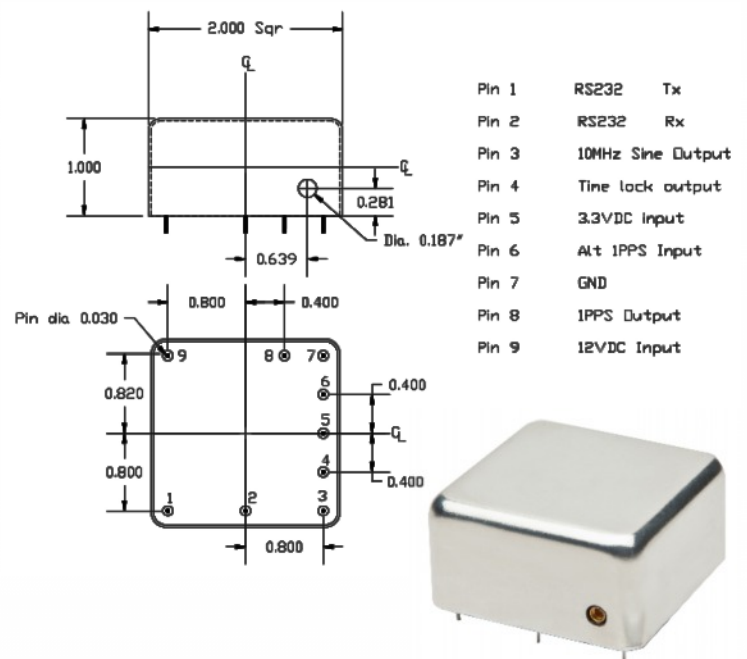

Satisfied customers include..

ABB Singapore

Airbus Defence & Space

ASM Technologies Ltd

Atkins

Babcock International

BAE Systems

BBC

Carillion Rail

CMC Engineering Malaysia

EDF Energy

Finmeccanica, UK

Indian Navy

Jakarta Metro

Leonardo Electronics Defence And Security

London Stock Exchange

London Underground

MBDA Ltd

MTRC Hong Kong

National Air Traffic Services

NEC

Network Rail National

Northrop Grumman Park Air Systems Ltd

Qinetiq Ltd

Raytheon Systems Ltd

Rockwell Automation

SBS Transit Singapore

Siemens Rail

Siemens Rail Automation Holdings Ltd.

Singapore Stock Exchange

St Electronics Singapore

Telent Technology Services Limited

Teligent

Thales UK

Transport For London

Viacom



Asia, China, India, Japan

Mr Neil Pitman
Director of Sales - Asia
China, India, Japan

+44 (0) 1376 5141 14 Phone
neil.pitman@timefreq.com

Europe, Middle East, Africa, Australia

Mr David Wright
Director of Sales, Europe, Middle East,
Africa, Australia

Tel : +44 (0) 1694 722891
dwright@timefreq.com

United Kingdom

Mr Mark Aheme
Director of Sales, UK

Tel : +44 (0) 1376 5141 14
mark.aheme@timefreq.com

tfs Time & Frequency Solutions

25 Eastways, Witham, Essex, CM8 3AL, UK
Phone +44 (0) 1376 5141 14 | Fax +44 (0) 1376 5161 16
enquiries@timefreq.com

Brandywine
communications

153 Warner Ave, Tustin, CA 92780, USA
Phone +1 714 755 1050
Info@brandywinecomm.com

Please visit our web sites at www.brandywinecomm.com or www.timefreq.com or call one of our regional offices.

Disclaimer : Brandywine & TFS are always seeking to improve our products, the information in this document only provides general indications of product capability, suitability and performance, none of which shall form any part of any contract.