

PDU-240 - PRECISION DIGITAL PULSE DISTRIBUTION



24 Output, 2 channel 1PPM - 10MPPS Digital Pulse Distribution Unit



AS9100D Certificate Number : C0210021-AS3



PDU-240 - PRECISION DIGITAL PULSE DISTRIBUTION

Product Overview



The PDU-240 Pulse Distribution Unit is a high quality, precision digital pulse distribution amplifier platform offered with a number of functional variants. Applications for the PDU-240 include reliable digital time reference signal distribution for installations utilising 1PPS, IRIG DCLS or HaveQuick, such as satellite ground stations, secure military communications and test ranges.

The PDU-240 base unit model has twenty-four digital outputs available at the rear panel via BNC connectors in response to one (Ref A :- 24 Out) or optionally two (Ref A & Ref B :- 2 x 12 Out) signal source reference inputs feeding the transfer switch. When used in the 2 x 12 output dual input reference mode, the PDU-240 automatically detects a failure of an input reference, thereby facilitating either automatic or manual switchover to the other reference input.

A three-position front panel switch facilitates the manual selection of either reference A or reference B or an automatic selection mode. When the automatic AUTO mode is selected the AUTO indicator will be illuminated and Input A will be used by default if it is viable. Should Input A fail then Input B will be chosen automatically. Front panel indicators show the status of the inputs and which input has been selected along with a power status indication.

Each of the twenty-four outputs is continually monitored and should an output fail for any reason, then a group alarm Fault indicator will illuminate and trigger a rear panel discrete Fault alarm signal that may be used by external equipment to modify the reference and output signal routing and selection.

The PDU-240 is available in a number of pre-configured model variants to suit signal amplitude and splitting requirements.


Key Feature Summary

Options & Features

- 24 fault protected, short rise time outputs - 10ns @ 3.3V.. 20ns @ 10V
- One or two digital reference signal inputs A or A & B in the range 1PPM to 10MPPS
- Output amplitude configurations : 3.3V, 5V and 10V user defined
- Automatic reference changeover with reference select input option
- Fault discrete inputs for external reference selection
- Compact 1U, 19" rack mount with front panel status indication
- Link selectable Input & Output Impedances - 50 Ohm or 1KOhm

Signals

- 24 discrete, fault tolerant and fully monitored digital outputs on BNC connectors
- Two independent reference signal inputs, A,B or both
- Fault status indication and fault driven reference changeover

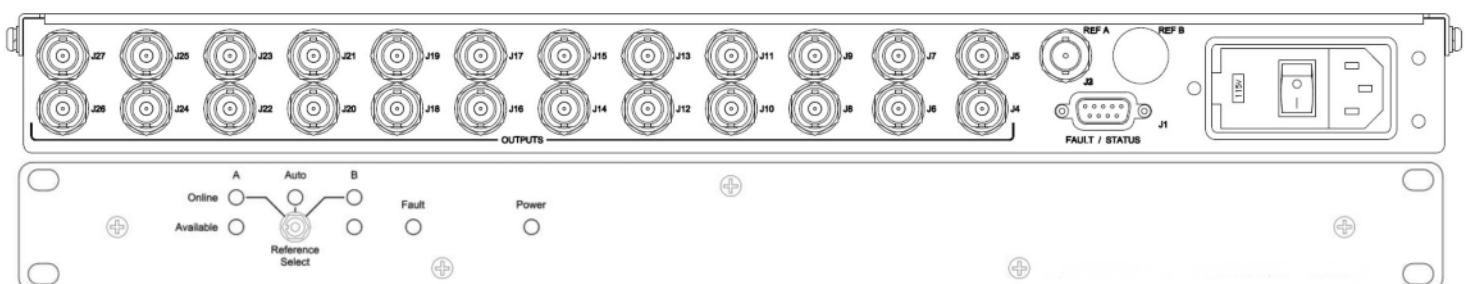

PDU-240 - PRECISION DIGITAL PULSE DISTRIBUTION

Specifications

Specifications - PDU-240	
Reference Frequency Inputs	Details
Connectors	2 x Rear panel BNC
Amplitude	2.5V (Min) to 10V(Max)
Input Impedance	50 Ohms / 1000 Ohms Link Selectable
Digital Frequency	1 Pulse Per Minute through to 10M Pulses Per Second (1PPM - 10MPPS)
Fault Discrete Input	
Number of inputs	2
Connector	9 Way D Type Socket
Level	TTL
Active Level	Link selectable, high or low to force reference changeover
Digital Outputs	
Number of outputs / channels	24 Outputs from 1 reference channel or 2 x 12 Outputs from 2 reference channels
Connectors	BNC
Digital Frequency	Same as reference input
Level	Outputs may be pre-configured for 3.3V, 5V or 10V, determined by model type.
Rise Time (10-90%)	10ns @ 3.3V : 15ns @ 5V output : 20ns @ 10V output
Environmental	
Temperature	Instrument : -10°C + 50°C / Antenna -40°C to + 85°C
Humidity	95 % non condensing
Power	85VAC - 265VAC 50/60Hz
Power Options	18-36 VDC, 36-72 VDC, - 48VDC
Physical	19" Rack 1U 1.75" (H) x 7.5" (D) x 17" (W) [4.4 cm(H) x 19 cm (D) x 43.2 cm (W)] Weight : 3.5 lb (1.6 Kg)
Compliance	CE Approved - EMC Emissions to EN55022 as EN55024 - FCC Part 15B, Class A EMC Immunity to EN50082-1 as EN61000-4-2 ESD, IEC801-3 HF Field & IEC 801-4
Model Option Part Numbers	Unit Configuration
18000501	2 switched input 24 output 10V level
18000502	2 switched input 24 output 5V level
18000503	2 switched input 24 output 3.3V level
18000504	2 independent inputs / 2 x 12 outputs : Group 1 @ 10V Group 2 @ 10V
18000505	2 independent inputs / 2 x 12 outputs : Group 1 @ 10V Group 2 @ 5V
18000506	2 independent inputs / 2 x 12 outputs : Group 1 @ 10V Group 2 @ 3.3V
18000507	2 independent inputs / 2 x 12 outputs : Group 1 @ 5V Group 2 @ 5V
18000508	2 independent inputs / 2 x 12 outputs : Group 1 @ 5V Group 2 @ 3.3V
18000509	2 independent inputs / 2 x 12 outputs : Group 1 @ 3.3V Group 2 @ 3.3V
18001000	85 - 265 VAC 50/60 Hz Universal Power Supply
18001001	36 - 72 VDC Isolated Power Supply
18001002	18 - 36 VDC Isolated Power Supply
18001003	9 - 18 VDC Isolated Power Supply

Satisfied customers include..

ABB Singapore Airbus Defence & Space ASM Technologies Ltd Atkins Babcock International BAE Systems BBC BP CMC Engineering Malaysia	EDF Energy Indian Navy Jakarta Metro Leonardo Electronics Defence And Security London Stock Exchange London Underground MBDA Ltd MTRC Hong Kong National Air Traffic Services	NASA NEC Network Rail Northrop Grumman Park Air Systems Ltd Qinetiq Ltd Raytheon Systems Ltd Rockwell Automation SBS Transit Singapore Siemens Transportation	Singapore Stock Exchange Telent Technology Services Limited Teligent Thales UK Transport For London Viacom
--	---	---	---

Sales Contacts and Global Representatives

TFS UK Head Office

Mrs Laura Cain
 Sales Coordinator
 TFS, Witham, CM8 3AL, UK
 Tel : +44 (0) 1376 514114
 laura.cain@timefreq.com

Europe, Middle East, Africa, Australia

Mr David Wright
 Director of Sales, Europe, Middle East,
 Africa, Australia
 Tel : +44 (0) 1694 722891
 dwright@timefreq.com

Asia, China, India, Japan

Mr Neil Pitman
 Director of Sales - Asia
 China, India, Japan
 Mobile : +44 (0) 7973 859342
 neil.pitman@timefreq.com

<p>Austria, Germany & Switzerland Semic RF Electronic GmbH Contact : Wolfgang Gruber Tel: +0049 89 614 1520 Email: sales@semic.de Web : www.semic.de</p> <p>Australia & New Zealand Unitronix Contact : Tim Marshall Tel: +0061 02 4977 3511 Email: sales@unitronix.com.au Web : www.unitronix.com.au</p> <p>Brazil Sigtron Instrumentos e Servicos Ltda Contact : Eduardo Strafacci Tel: +0055 11 5031 7359 Email: eduardo@sigtron.com.br Web : http://sigtron.com.br/</p> <p>China, Hong Kong & Macau Spectrum & Master Comms. Technologies Contact : Mr William Lai Tel: +852 2529 1111 / Mobile +852 9378 9271 Email: smcthk@netvigator.com</p> <p>Indochina (Vietnam, Laos, Cambodia) Hanova JSC Contact : Mr Hai Le Tel: +84 91 351 4905 Email: hai.le@hanova.vn Web : www.hanova.vn</p> <p>India PDAC Microsystems Pvt Ltd Contact : Mr Pradeep Dhar Tel: +91 40 40247626 / Mobile +91 80082 95670 Email: pradeep@pdac.in Web : www.pdac.in</p> <p>Janus Trading Co Contact : Mr Santosh Krishnan Tel: +91 124 408 6641 Email: santosh@januscorp.in Web : www.januscorp.in</p> <p>Signowave Solutions Private Limited Contact : Santosh Kulkarni Tel : +91 40 6717 2356 / Mobile : +91 70327 09060 Email: santosh.kulkarni@signowave.com Web : www.signowave.com</p>	<p>Israel IES Electronics Agencies (1986) Ltd Contact : Avi Nataf Tel: +00972 37530700 Email: info@nisko-ies.com Web : www.nisko-ies.com</p> <p>Italy Millimettrica RF & Microwave Components SRL Contact : Aldo Cagno Tel: +0039 011 317 9910 Email: acagno@millimettrica.it Web : www.millimettrica.it</p> <p>Japan Nacelle Co Ltd Contact : Mr Hisato Tadokoro Tel : +81 3 5921 5099 Email : tadokoro@nacelle.co.jp Web : www.nacelle.co.jp</p> <p>Korea ETOOB Contact : Jaydon Lee Tel : +82-2-6677-3409 Email : jaydon.lee@etooob.co.kr Web : www.etooob.co.kr</p> <p>Malaysia Alam Sinergi Teknik Sdn. Bhd. Contact : Mr HH Chew Tel: +60 3 7847 5925 / Mobile: +60 13 5131068 Email: hhchew@alamsinergitekNIK.com</p> <p>North America : USA & CANADA Brandywine Communications Inc. Tel: +1 877 367 7962 Fax: +1 714 755 0175 Email: info@brandywinecomm.com Web : www.brandywinecomm.com</p> <p>North Africa, Mauritania, Morocco, Tunisia, Algeria, Libya, Egypt, Chad, Mali ProComSat Contact : Hussein Ait Si Selmi Tel: +0021321548618 Email: hussein@procomsat.com Web : www.procomsat.com</p> <p>Spain & Portugal Tecnologia GPS S.A. Contact : Jose Luis Estaban Tel: +34 91 323 72 30 Email: comercial@tecnogps.es Web : www.tecnogps.es</p>	<p>Philippines Imaginet International Inc Contact : Mr Blair Duncan Tel: +63 2 895 9755 / Fax : +63 2 895 9766 Email: blair@imagnet.com.ph Web : www.imagnet.com.ph</p> <p>Singapore PROGRESO Networks (S) Pte Ltd Contact : Victor Tang Tel: +65 6509 9600 / Mobile +65 9735 1700 Email: victor@progreso.com.sg Web: www.progreso.com.sg</p> <p>Thailand CSG Solution (Thailand) Company Ltd Contact : Mr Chinnaret Kusathisiriphan Tel: +66 2 575 2971 / Mobile +66 94 951 6524 Email: chinnaretk@csgs.co.th Web: www.csgs.co.th</p> <p>Turkey Merit Elektronik Contact : Levent Celebi Tel: +0090 312 472 7495 Email: leventc@meritelektronik.com.tr Web : www.meritelektronik.com.tr</p> <p>South Africa Satellite 2000 Systems International Inc Contact : Fred Joubert Tel: +001 818 991 9794 Email: sales@sat-2k.com Web : www.sat-2k.com</p> <p>U.A.E. Zener Fire & Security LLC Contact : Ranjith Nambiar Tel: +0021321548618 Email: ranjith@zenerfire.com Web : www.zenerfire.com</p>
--	---	---

tfs Time & Frequency Solutions

25 Eastways, Witham, Essex, CM8 3AL, UK
 Phone +44 (0) 1376 514114 | Fax +44 (0) 1376 516116
 Email : enquiries@timefreq.com

brandywine communications

153 Warner Ave, Tustin, CA 92780, USA
 Phone +1 714 755 1050
 Email : Info@brandywinecomm.com

Disclaimer : Brandywine & TFS are always seeking to improve our products, the information in this document only provides general indications of product capability, suitability and performance, none of which shall form any part of any contract.