

# MGPSDO - MINIATURE GPS DISCIPLINED OSCILLATOR MODULE



## Miniature GPS Referenced Commercial 10 MHz Frequency Standard Component Level Device



AS9100D Certificate Number : C0210021-AS3



# MGPSDO - MINIATURE GPS DISCIPLINED OSCILLATOR MODULE

## Product Overview

The miniature GPS Disciplined Oscillator combines the power of our existing disciplined oscillators in a footprint the size of an OCXO.

Designed with interoperability in mind, the Miniature GPS Disciplined Oscillator meets military requirements such as MIL-STD-188-164A. The GPSDO supplies a low noise, precision 10 MHz frequency reference signal output. This output is accurate to  $1 \times 10^{-12}$  when slaved to a GPS source.

The frequency standard is also able to slave to an external 1PPS signal to steer and hold the internal oscillator and clock system precisely in time. Time and frequency information is maintained to a very high accuracy during by the disciplined internal oscillator even when no satellites can be tracked.

A serial data port is provided to report time, date, position, and GPS satellite health and signal strength.

Optional capabilities include automatic interface to an external military GPS receiver such as the Defence Advanced GPS Receiver (DAGR), Standard frequency output is 10 MHz, but other frequencies are possible.

## Key Feature Summary

### Timing & Interfaces

- Low Phase Noise 10MHz Output
- Internal GPS Tracking Receiver
- External 1PPS Input
- Very small footprint designed for component level easy integration
- Disciplined High Stability OCXO

### Outputs

- Low Phase Noise 10MHz Outputs
- Serial Time Of Day Message TOD
- 1PPS

Also of interest may be our 3 Output GPS reference oscillator module




# MGPSDO - MINIATURE GPS DISCIPLINED OSCILLATOR MODULE

## Specifications

Specifications - GPSDO	
<b>Reference Signal Inputs - 1PPS</b>	<b>Details</b>
Pinning	1 x Pin 6
Amplitude	0V to 5V - 50 Ohms
<b>Reference Signal Inputs - GPS</b>	
Connectors	1 x MMCX Connector
Receiver Type	Satellite Signal : 12 Channels : GPS L1 1575.42 Mhz / Satellite Code : C/A code 1.023 MHz
Sensitivity	138dBm
<b>Accuracy Details</b>	
Time Accuracy - GPS	< 30ns
Time Accuracy - 1 PPS	< 30ns
Holdover	< 20µs in 24 hrs
<b>Power Supply Details</b>	
Pinning	Pin 5 : 3.3V DC Pin 9 : 12 V DC Pin 7 : GND
Power	Warm up consumption : 15 Watts Steady State : 5 Watts
<b>Outputs</b>	
1 PPS	Pin 8 : 0 - 5V DC into 50 Ohms
10 MHz	Pin 3 : 7dBm +/- 2dBm
GPS Lock Indicator	Pin 4 : TTL
<b>Interface</b>	
RS 232, TTL levels	Pin 1 : RS232 Tx Pin 2 : RS232 Rx Pin 7 : GND
<b>Environmental</b>	
Temperature	Operational : -20°C + 60°C / Storage -40°C to + 85°C.
Humidity	95 % non condensing
Altitude	Operational to 10,000 ft - transit not operational to 50,000 ft
<b>Physical</b>	50mm x 50mm x 25mm

Phase Noise / Short Term Stability (10MHz)	
SSB Phase Noise	dBc/Hz
1 Hz	-90
10 Hz	-120
100 Hz	-145
1 KHz	-151
10 KHz	-153
100 KHz	-155
<b>STS (Allan Variance) (after 24hrs)</b>	
1 Sec	< 8.0 x 10 <sup>-12</sup>
10 Sec	< 1.0 x 10 <sup>-11</sup>
100 Sec	< 1.5 x 10 <sup>-11</sup>
1000 Sec	< 1.5 x 10 <sup>-11</sup>

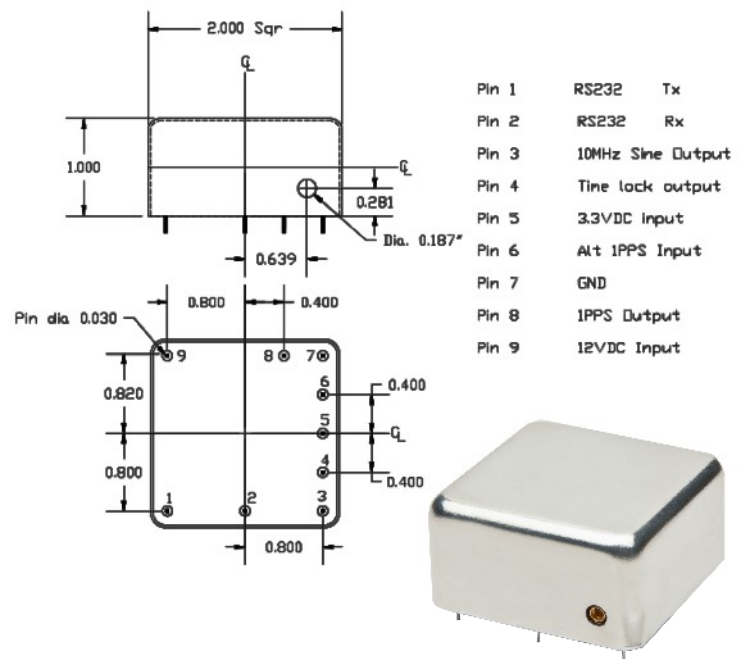

# Satisfied customers include..

ABB Singapore Airbus Defence & Space ASM Technologies Ltd Atkins Babcock International BAE Systems BBC BP CMC Engineering Malaysia	EDF Energy Indian Navy Jakarta Metro Leonardo Electronics Defence And Security London Stock Exchange London Underground MBDA Ltd MTRC Hong Kong National Air Traffic Services	NASA NEC Network Rail Northrop Grumman Park Air Systems Ltd Qinetiq Ltd Raytheon Systems Ltd Rockwell Automation SBS Transit Singapore Siemens Transportation	Singapore Stock Exchange Telent Technology Services Limited Teligent Thales UK Transport For London Viacom
--	---	---	---

## Sales Contacts and Global Representatives

### TFS UK Head Office

Mrs Laura Cain  
 Sales Coordinator  
 TFS, Witham, CM8 3AL, UK  
 Tel : +44 (0) 1376 514114  
 laura.cain@timefreq.com

### Europe, Middle East, Africa, Australia

Mr David Wright  
 Director of Sales, Europe, Middle East,  
 Africa, Australia  
 Tel : +44 (0) 1694 722891  
 dwright@timefreq.com

### Asia, China, India, Japan

Mr Neil Pitman  
 Director of Sales - Asia  
 China, India, Japan  
 Mobile : +44 (0) 7973 859342  
 neil.pitman@timefreq.com

<p><b>Austria, Germany &amp; Switzerland</b>  <b>Semic RF Electronic GmbH</b>                  Contact : Wolfgang Gruber                  Tel: +0049 89 614 1520                  Email: sales@semic.de                  Web : www.semic.de</p> <p><b>Australia &amp; New Zealand</b>  <b>Unitronix</b>                  Contact : Tim Marshall                  Tel: +0061 02 4977 3511                  Email: sales@unitronix.com.au                  Web : www.unitronix.com.au</p> <p><b>Brazil</b>  <b>Sigtron Instrumentos e Servicos Ltda</b>                  Contact : Eduardo Strafacci                  Tel: +0055 11 5031 7359                  Email: eduardo@sigtron.com.br                  Web : http://sigtron.com.br/</p> <p><b>China, Hong Kong &amp; Macau</b>  <b>Spectrum &amp; Master Comms. Technologies</b>                  Contact : Mr William Lai                  Tel: +852 2529 1111 / Mobile +852 9378 9271                  Email: smcthk@netvigator.com</p> <p><b>Indochina (Vietnam, Laos, Cambodia)</b>  <b>Hanova JSC</b>                  Contact : Mr Hai Le                  Tel: +84 91 351 4905                  Email: hai.le@hanova.vn                  Web : www.hanova.vn</p> <p><b>India</b>  <b>PDAC Microsystems Pvt Ltd</b>                  Contact : Mr Pradeep Dhar                  Tel: +91 40 40247626 / Mobile +91 80082 95670                  Email: pradeep@pdac.in                  Web : www.pdac.in</p> <p><b>Janus Trading Co</b>                  Contact : Mr Santosh Krishnan                  Tel: +91 124 408 6641                  Email: santosh@januscorp.in                  Web : www.januscorp.in</p> <p><b>Signowave Solutions Private Limited</b>                  Contact : Santosh Kulkarni                  Tel : +91 40 6717 2356 / Mobile : +91 70327 09060                  Email: santosh.kulkarni@signowave.com                  Web : www.signowave.com</p>	<p><b>Israel</b>  <b>IES Electronics Agencies (1986) Ltd</b>                  Contact : Avi Nataf                  Tel: +00972 37530700                  Email: info@nisko-ies.com                  Web : www.nisko-ies.com</p> <p><b>Italy</b>  <b>Millimettrica RF &amp; Microwave Components SRL</b>                  Contact : Aldo Cagno                  Tel: +0039 011 317 9910                  Email: acagno@millimettrica.it                  Web : www.millimettrica.it</p> <p><b>Japan</b>  <b>Nacelle Co Ltd</b>                  Contact : Mr Hisato Tadokoro                  Tel : +81 3 5921 5099                  Email : tadokoro@nacelle.co.jp                  Web : www.nacelle.co.jp</p> <p><b>Korea</b>  <b>ETOOB</b>                  Contact : Jaydon Lee                  Tel : +82-2-6677-3409                  Email : jaydon.lee@etooob.co.kr                  Web : www.etooob.co.kr</p> <p><b>Malaysia</b>  <b>Alam Sinergi Teknik Sdn. Bhd.</b>                  Contact : Mr HH Chew                  Tel: +60 3 7847 5925 / Mobile: +60 13 5131068                  Email: hhchew@alamsinergitekNIK.com</p> <p><b>North America : USA &amp; CANADA</b>  <b>Brandywine Communications Inc.</b>                  Tel: +1 877 367 7962 Fax: +1 714 755 0175                  Email: info@brandywinecomm.com                  Web : www.brandywinecomm.com</p> <p><b>North Africa, Mauritania, Morocco, Tunisia, Algeria, Libya, Egypt, Chad, Mali</b>  <b>ProComSat</b>                  Contact : Hussein Ait Si Selmi                  Tel: +0021321548618                  Email: hussein@procomsat.com                  Web : www.procomsat.com</p> <p><b>Spain &amp; Portugal</b>  <b>Tecnologia GPS S.A.</b>                  Contact : Jose Luis Estaban                  Tel: +34 91 323 72 30                  Email: comercial@tecnogps.es                  Web : www.tecnogps.es</p>	<p><b>Philippines</b>  <b>Imaginet International Inc</b>                  Contact : Mr Blair Duncan                  Tel: +63 2 895 9755 / Fax : +63 2 895 9766                  Email: blair@imagnet.com.ph                  Web : www.imagnet.com.ph</p> <p><b>Singapore</b>  <b>PROGRESO Networks (S) Pte Ltd</b>                  Contact : Victor Tang                  Tel: +65 6509 9600 / Mobile +65 9735 1700                  Email: victor@progreso.com.sg                  Web: www.progreso.com.sg</p> <p><b>Thailand</b>  <b>CSG Solution (Thailand) Company Ltd</b>                  Contact : Mr Chinnaret Kusathisiriphan                  Tel: +66 2 575 2971 / Mobile +66 94 951 6524                  Email: chinnaretk@csgs.co.th                  Web: www.csgs.co.th</p> <p><b>Turkey</b>  <b>Merit Elektronik</b>                  Contact : Levent Celebi                  Tel: +0090 312 472 7495                  Email: leventc@meritelektronik.com.tr                  Web : www.meritelektronik.com.tr</p> <p><b>South Africa</b>  <b>Satellite 2000 Systems International Inc</b>                  Contact : Fred Joubert                  Tel: +001 818 991 9794                  Email: sales@sat-2k.com                  Web : www.sat-2k.com</p> <p><b>U.A.E.</b>  <b>Zener Fire &amp; Security LLC</b>                  Contact : Ranjith Nambiar                  Tel: +0021321548618                  Email: ranjith@zenerfire.com                  Web : www.zenerfire.com</p>
--	---	---

**tfs Time & Frequency Solutions**

25 Eastways, Witham, Essex, CM8 3AL, UK  
 Phone +44 (0) 1376 514114 | Fax +44 (0) 1376 516116  
 Email : enquiries@timefreq.com

**brandywine communications**

153 Warner Ave, Tustin, CA 92780, USA  
 Phone +1 714 755 1050  
 Email : Info@brandywinecomm.com

Disclaimer : Brandywine & TFS are always seeking to improve our products, the information in this document only provides general indications of product capability, suitability and performance, none of which shall form any part of any contract.